



CONDUCTIVITY MEASURING DEVICE

PRODUCT SERIES IN-LINE-MEASUREMENT MLA1000



Agence Nord:
ZA Objectifs Sud - Lot A3
6 Allée Emile du Châtelet
14123 Ifs
tél : 02.31.34.50.74
fax : 02.31.34.55.17

Agence Sud:
Bât Le Venango, 392 Rue Jean Dausset
AGROPARC - BP11575
84916 Avignon Cédex 9
tél : 04.90.27.17.95 fax : 04.90.27.17.52




Agence Est:
Parc Club des Tanneries
2 Rue de la Faisanderie
67380 Lingolsheim
tél : 03.88.04.01.81
fax : 03.88.93.01.52

www.deltalabo.fr
info@deltalabo.fr

Continuous measurement of the conductivity and temperature in light mineral oils

MLA1000

- + *Measuring method according to ASTM D2624*
- + *High measurement accuracy*
- + *Digital recording of measurement data*
- + *Easy start-up*
- + *Measurement in ATEX Zone 0*

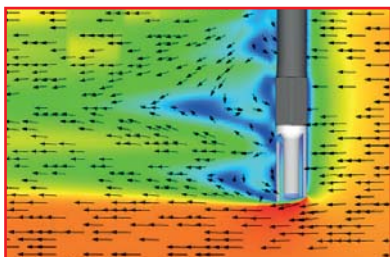

Flow model of the patented measuring probe



Optional fastening of the display unit on the probe tube



Additional check of the measurement data directly on-site



CONDUCTIVITY MEASURING DEVICE

PRODUCT SERIES IN-LINE-MEASUREMENT MLA1000




MLA1000 the stationary, continuous measurement system

The MLA 1000 measures the electrical conductivity and temperature of light mineral oils such as kerosene, for example. Measurement of the electrical conductivity is a prerequisite for the high safety requirements. Only through accurate knowledge of the electrical conductivity can decisions be made regarding whether the medium can be pumped safely. If the electrical conductivity is too low, then this will result in electrostatic charging followed by discharging, which often becomes a dangerous ignition source because of sparking. In addition to the electrical conductivity, the MLA 1000 also measures the temperature.

Measurements are taken in the pipeline continuously and sent to the PLC control unit in the control room. With the determined average values, the additives can be controlled optimally in order to obtain the stipulated conductivity value.

Areas of application:

light mineral oils such as, for example, kerosene (Jet a-1); rolling oil; hydraulic oil; release agents...

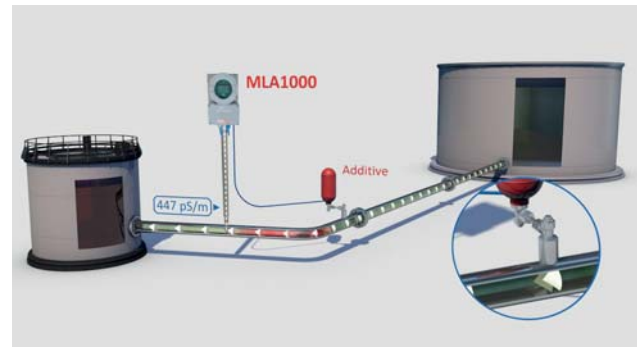

TECHNICAL DESCRIPTION

Measurement values

Electrical conductivity:	5 ... 2.000 pS/m	5 ... 10.000 pS/m	5 ... 15.000 pS/m
Temperature:	-20 ... +60°C		

Measurement accuracy/tolerances

Electrical conductivity:	5 ... 100 pS/m ±5 pS/m	above 100 pS/m ±2 % of the measured value
Temperature:	±0.5 °C of the measured value	

Certifications for use in potentially explosive areas

Display unit MLA1000-A:	gas exzone 1	Ex II 2(1)G Ex de [ia Ga] IIB T4 Gb
Measuring probe MLA1000-S:	gas exzone 0	Ex II 1G Ex ia IIB T4 Ga

Measured value outputs

Display on the unit:	electrical conductivity, temperature and unit status
Signal outputs:	electrical conductivity: 4 ... 20 mA / Temperature: 4 ... 20 mA 24 mA: Measured value exceeded / 0 mA: fault

Operating voltage

Voltage input:	24 V DC (±10%) / Capacity: 5 W
----------------	--------------------------------

Product properties

Probe:	Nickle-plated surface
Process connection:	loose flange connection (min. DN50 / 2")
Probe tube material:	Stainless steel
Cable length display/probe:	max. 24 m
Housing protection of display unit:	IP65

Operating requirements

Operating pressure:	max. 16 bar
Flow rate:	0,5 ... 7 m/s
Viscosity:	less than 2 m Pa·s
Ambient temperature:	-20 ... +60 °C