

Agence Nord:

ZA Object'Ifs Sud - Lot A3
6 Allée Emilie du Châtelet
14123 Ifs
tél : 02.31.34.50.74
fax : 02.31.34.55.17

Agence Est:

Parc Club des Tanneries
2 Rue de la Faisanderie
67380 Lingolsheim
tél : 03.88.04.01.81
fax : 03.68.93.01.52

**Agence Sud:**


Bât Le Venango, 392 Rue Jean Dausset
AGROPARC - BP11575
84916 Avignon Cédex 9
tél : 04.90.27.17.95 fax : 04.90.27.17.52

www.deltalabo.fr
info@deltalabo.fr

10-104-000 Manual Penetrometer

Norms/ Standards/ Guidelines

ASTM D5, ASTM D217, ASTM D937, ASTM D1321, ASTM D1403, ASTM D5329, ASTM D7342, DIN 51579, DIN 51580, EN 1426, EN 13179-2, EN 13880-3, ISO 2137, IP 50, IP 179, IP 310, IP 376, DAB 10-V.5.8.1

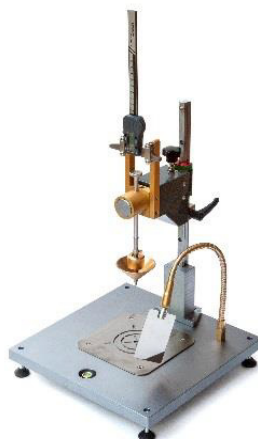

Application

Manual penetrometer for determination of ductility/ stiffness of ductile and elastic masses (lubricating grease, salves, creams, pastes, bitumen) via penetration.

A test body is precisely lowered to the surface of the material under test, and then sinks into the matter by its own weight during a defined test duration. This penetration, which is indicated in millimetres allows a rating of the plasticity or consistency. A wide range of test bodies according to the relevant standards is available. Custom test specimens on request.

Features

The unit has a Metallic base with inset spirit level and adjustable feet. Stainless steel column supporting a calibrated dial with digital display and release button with manual holding function and Micrometric regulation.

Specifications

Measuring range	0-70 mm
Resolution	0,01 mm

Accessories

included: Plunger 47,5 g

Additional Accessories and Spare Parts:
Is in separate product information available.